



OxyOne-100

Oxygen Analyser / Inerting System



The OxyOne Oxygen Analyser is a microprocessor based instrument capable of accepting an oxygen sensor input and utilising this input to control external user components or alarms based upon user configurable setpoint signal outputs.

Features

- Auto Calibration & Diagnostics LED
- Colour Touch Screen, 5.7"
- Single Sensor Input
- Mode Feature
- Data Logging
- RS232/RS485 Communications
- Password Protected Configuration
- Multiple Digital / Analogue Outputs
- User Configurable Addressable Alarms
- 19" Rack Mounting
- Dual Range Measurement Commissioning
- Trend of Oxygen Measurement Historically

Product overview

The Ntron OxyOne is designed to interface directly with Ntron supplied Sensors or Sampling Systems, including Sensor and Flow Switch inputs or two separate Sensors.

The Analyser is also equipped to direct and control the the automatic calibration of each Sensor or Sampling System in an independant manner through the use of remotely located solenoid valves.

All electrical interfacing with the Sensors or Sampling System is made by the user through connection Terminals and Barriers supplied with the Analyser.

The OxyOne has a number of operating modes which are user selectable and include a simulation/commissioning mode that allows the user to test the system and various circuits without having to use test gases or Sensors. A communication port allows high speed configuration and remote diagnostics.

The OxyOne Analyser provides flexibility for use in various applications with the same reliability and accuracy that has been consistent with the Ntron name. These applications include: Reactors, Mixing Vessels, Centrifuges, Mills & Dryers, Vessels & Vent Lines, Ambient Atmospheres, Conveying Systems.

**EXCELLENCE
THROUGH DIVERSITY**


Datasheet:
D-02-300-P-001



OxyOne-100 Product specifications

Model	OxyOne Analyser Rack Mounted(19" 4u High)
Overall size	Rack mounted 485mm (w) x 180mm (h) x 375mm (d)
Gas type measured	Oxygen
Range / Resolution	0-10%, 0-25% / 0.1% Oxygen
Power requirements	19-30 VDC / 115 / 230 VAC 50Hz
Electrical Connections	Spring Clamp Terminals 4.0mm CSA Max.
Temperature / Humidity	-20°C to 60°C / 10-95% RH Non Condensing
Display	5.7" Colour Touch Screen
User Interface	Via Soft Keys on Touch Screen
Outputs	6x Relays, 4x Transistor, 2x Analogue 4-20mA, RS232 / 485
Accuracy	+/- 0.1% Oxygen
Calibration	Automatic, Manual or Event
Certification	CE, UL
Memory/Data Storage	SD Card (Removable)

OxyOne-100 Typical Application

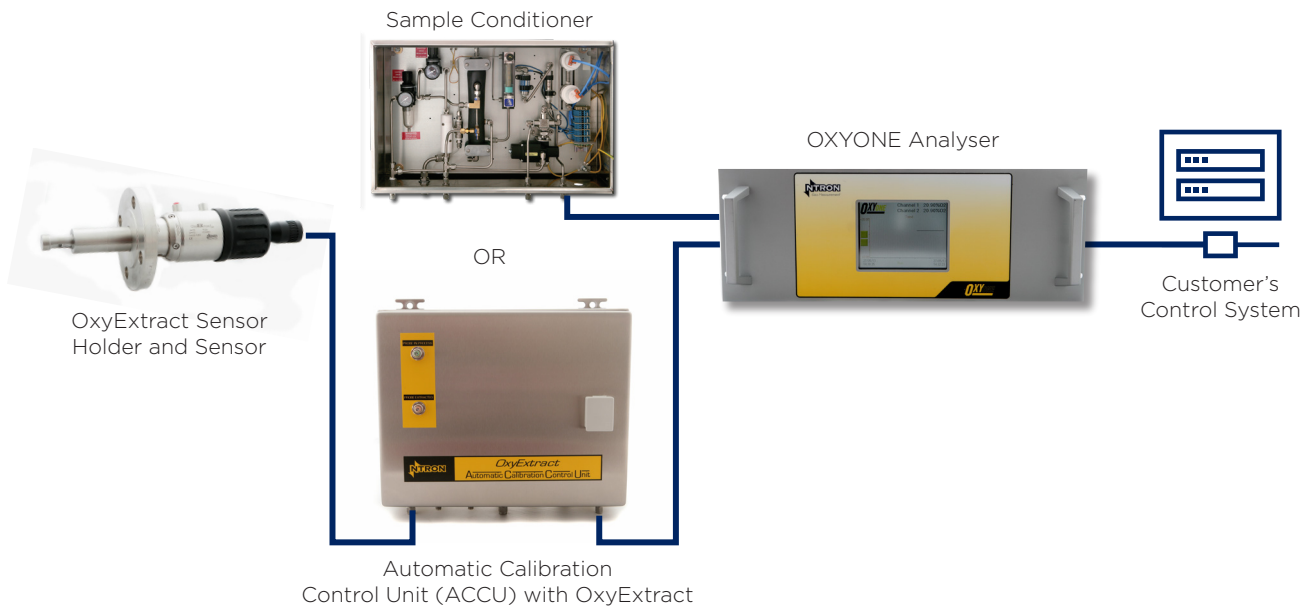

OxyOne-100 Ordering information

Product	Mounting	Oxygen Sensors	Power Supply	Outputs	SD Card	Part No.
OxyOne	Rack	Single	115/230VAC	6 / 4 / 2	YES	02-300

