



Windowless USB2.0 Monochrome 1.3MP CMOS Cameras (10-bit)

(Part Numbers: BTE-B013-UW and BTE-B013-UWS)

FEATURES

- Higher sensitivity than sensors with windows
- Free from unwanted interference fringes
- 32MB on-board memory (23 frames at 8 bit, and 4 frames at 10 bit, at full resolution)
- Switchable between 10 bit and 8 bit
- Arbitrary ROI
- 4-pin GPIOs
- Support simultaneous image capturing from multiple cameras
- 1,280 x 1,024 active image pixels
- High-speed USB2.0 (480Mb/s)
- Digital output, no need for frame grabber
- Full-featured SDK
- TWAIN and DirectShow drivers
- Linux and LabVIEW drivers
- External and software triggering
- Strobe out for external flash
- ROI & pixel skipping/binning
- No need for external power supply

APPLICATIONS

- Laser beam profiling
- Laser interferometry
- Digital holography
- Holography data storage
- Digital microscopy
- Machine vision
- Medical imaging
- Semiconductor equipment
- Test instruments



PRODUCT DESCRIPTION

Mightex USB 2.0 monochrome cameras are designed for a wide variety of applications such as digital microscopy and medical imaging, where quality, ease of use, and cost-effectiveness are crucial. Monochrome cameras often exhibit 20% higher spatial resolution than their color counterparts because no pixel interpolation is necessary. Without a Bayer color filter on the sensor, monochrome cameras are also more sensitive than color sensors especially in near IR and UV regions. Frame rate can be as high as 12 fps in full resolution and up to 150 fps using ROI mode. A user-friendly GUI based application software and an SDK are provided for custom software development. In addition, a TWAIN driver, a DirectShow driver and a LabVIEW driver are also provided to easily link the cameras with users' applications. A USB command set protocol and a Linux driver are also provided for non-windows based applications. Window-less cameras are particularly useful for applications that are sensitive to multiple reflections due to the existence of the glass window in front of the CMOS sensor.

PERFORMANCE SPECIFICATIONS

| Parameters | BTE-B013-UW and BTE-B013-UWS | Unit |
|-----------------------------------|--|-----------|
| Board-level / enclosed | Enclosed | |
| Number of GPIOs | 4 | |
| Resolution | 1,280 x 1,024 monochrome | |
| CMOS Chip | ½" (5:4) Micron MT9M001 | |
| Pixel Size | 5.2 x 5.2 | µm |
| Active Imager Size | 6.66 x 5.32 | |
| Scanning System | Progressive | |
| Dynamic Range | 68 | dB |
| Sensor SNR | 45 | dB |
| Gray Level | 10 | bit |
| Responsivity | 2.1 | V/lux-sec |
| On-board Memory ("Frame Buffers") | 32 | MB |
| Frame Rates* (@48MHz Clock) | 12 @1,280 x 1,024, 18 @1,024 x 768 25 @800 x 600, 28 @752 x 480 33 @640 x 480, 70 @320 x 240 | fps |
| Sub Resolutions | Support arbitrary ROI, (X, Y) with X and Y multiples of 4 | |
| Shutter Speed (Exposure time) | 0.04 ~ 750 | ms |
| Hardware Gains | 0.125X ~ 8X | |
| Trigger Mode | With external trigger** | |
| Lens Mount | C-Mount, CS-Mount or custom-defined | |
| Built-in Filters | None | |
| Power Consumption | < 1.8 | W |
| Dimension | 58 x 58 x 34 (CS-mount), 58 x 58 x 39 (C-mount) | mm |
| Weight (excluding lens) | 150 | g |

* The actual achievable frame rate depends on exposure time, as well as resources of PC system

** Part number of the trigger cable for external trigger : ACC-CAM-DIN8

Windowless USB2.0 Monochrome 1.3MP CMOS Cameras (10-bit)

(Part Numbers: BTE-B013-UW and BTE-B013-UWS)


OPERATION CONDITION

Operating Temperature Range: 0°C ~ 45°C
Storage Temperature Range: -25°C ~ 85°C
Relative Humidity, Non-condensing: 5% ~ 95%

RECOMMENDED SYSTEM CONFIGURATION

Processor: Pentium III 900 MHz or better, or a compatible processor
Operating System: Windows 2000, XP, Vista, Windows 7 and 8
RAM: 256MB or greater
Hard Disk Space: 30MB for software installation, plus additional space for storing captured images
USB2.0 Host Controller: Intel Integrated Host Controller (Recommended)

EXAMPLE OF GRAPHICAL USER INTERFACE

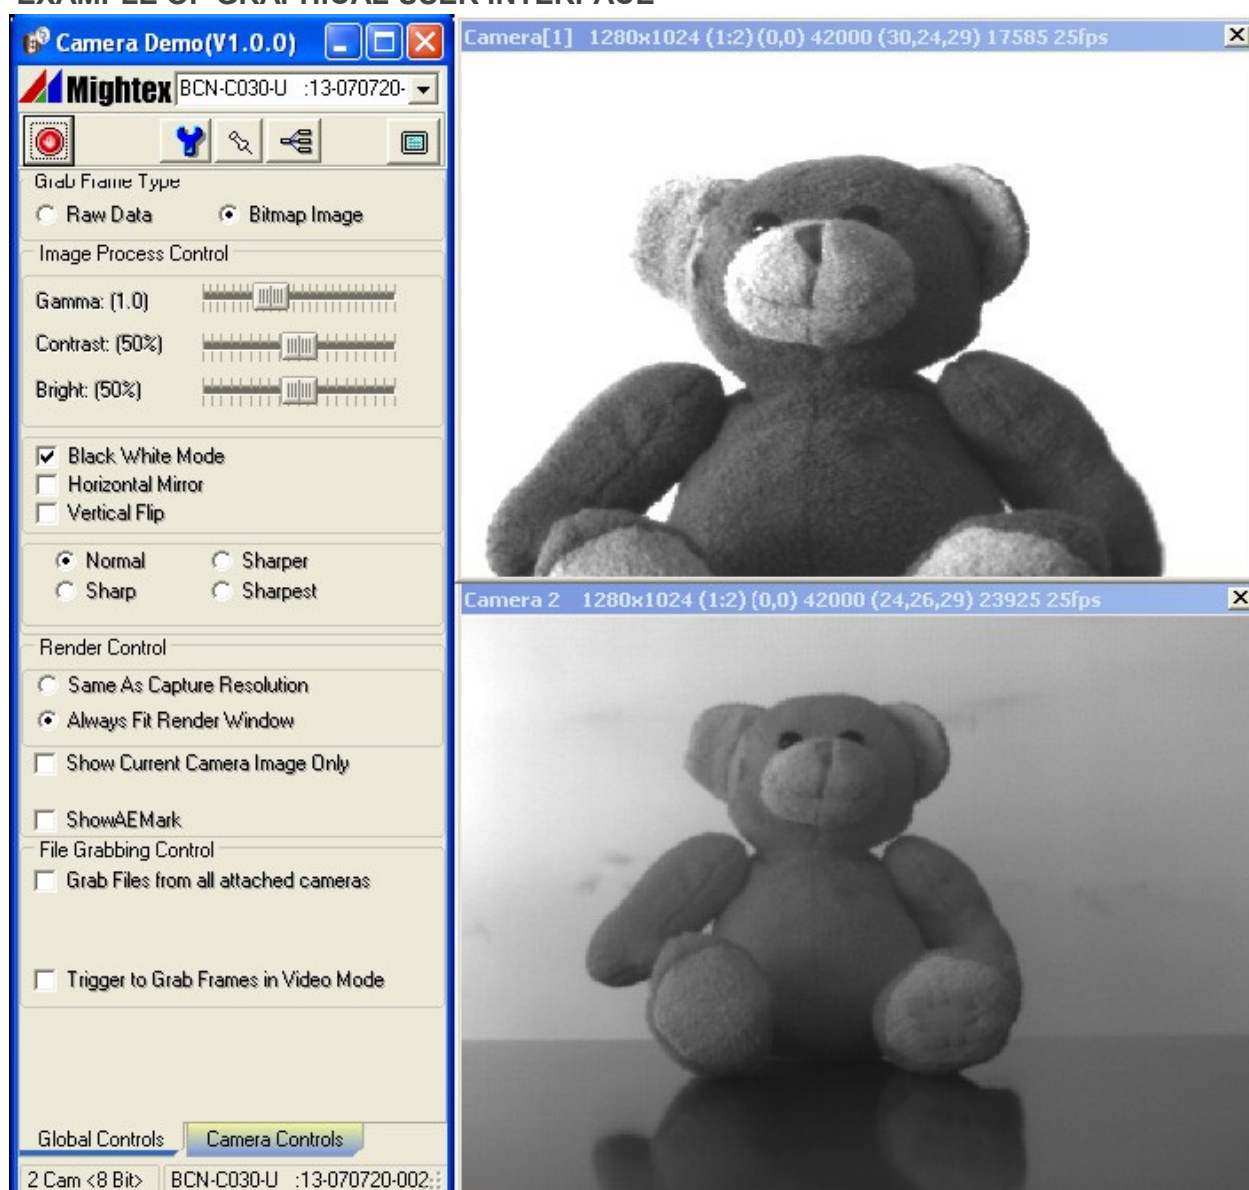


Windowless USB2.0 Monochrome 1.3MP CMOS Cameras (10-bit)

(Part Numbers: BTE-B013-UW and BTE-B013-UWS)

INSTALLATION DRAWINGS

Enclosed camera with CS-mount

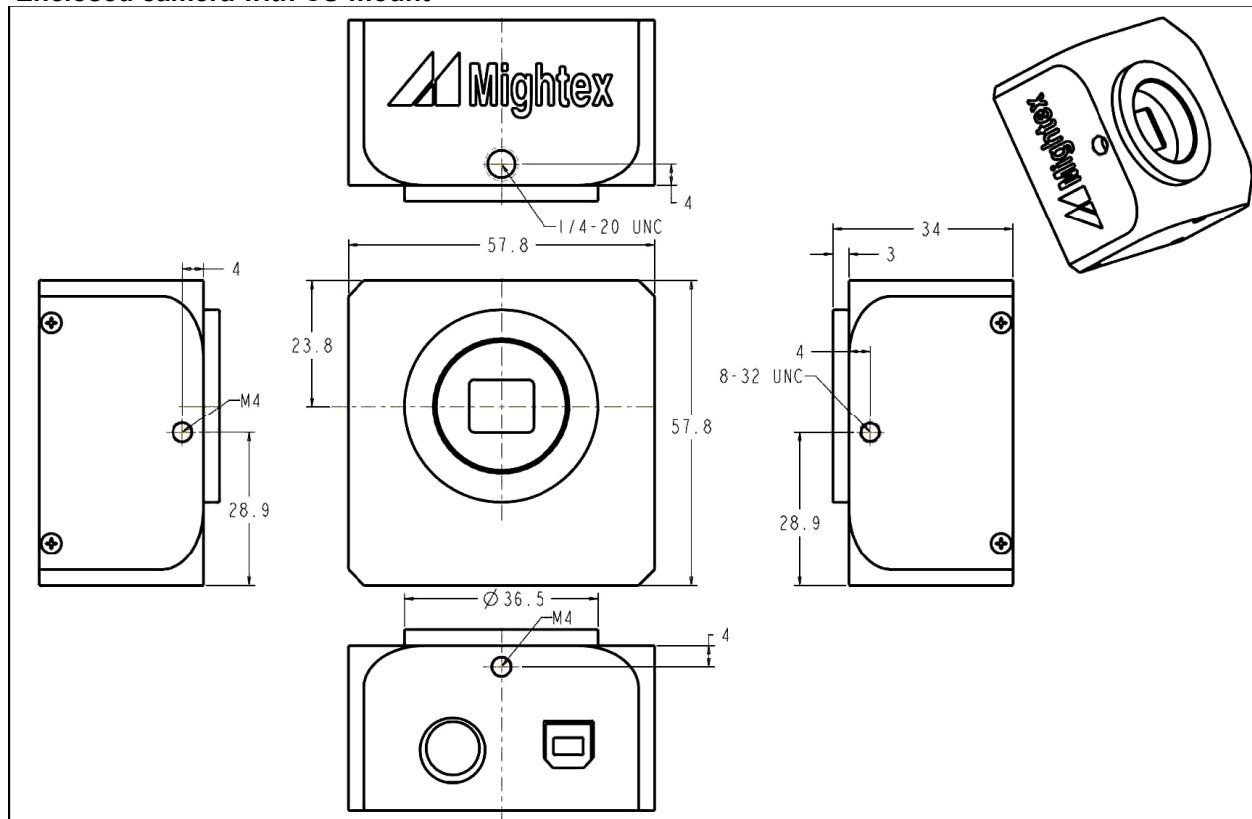




Windowless USB2.0 Monochrome 1.3MP CMOS Cameras (10-bit)

(Part Numbers: BTE-B013-UW and BTE-B013-UWS)

WHAT'S IN A C-MOUNT CAMERA?

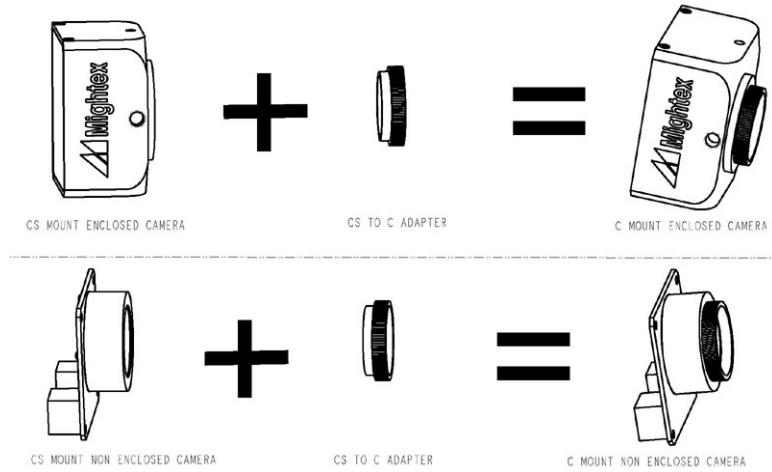

A C-mount camera is composed of a CS-mount camera and a CS-to-C-mount adapter. The latter is essentially a 5mm thick threaded ring.

With a world-class OEM design team, Mightex offers a broad range of customized solutions in order to meet individual customer's unique requirements. Please call 1-416-840 4991 or email sales@mightex.com for details.